




# CONQUEST

CONQUER THE JOB

## 18-8 STAINLESS WASHER STANDARD FLAT DIMENSIONAL INFORMATION

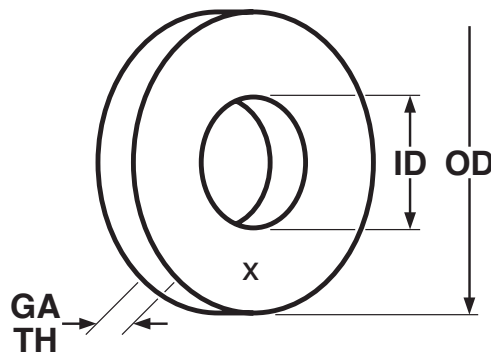

STANDARD FLAT-WASHERS - 18-8 STAINLESS STEEL

Size	OD		ID		TH	
	Outside Diameter		Inside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
1/4"	0.698"	0.683"	0.291"	0.276"	0.045"	0.034"
5/16"	0.885"	0.87"	0.355"	0.34"	0.069"	0.055"
3/8"	1.01"	0.995"	0.416"	0.399"	0.057"	0.043"
1/2"	1.405"	1.368"	0.577"	0.557"	0.132"	0.086"
5/8"	0.160"	0.108"	0.718"	0.681"	0.160"	0.108"
3/4"	2.03"	1.993"	0.842"	0.805"	0.177"	0.122"
7/8"	2.270"	2.245"	0.952"	0.930"	0.115"	0.093"
1"	2.520"	2.495"	1.077"	1.055"	0.132"	0.108"

<b>Description</b>	A thin, flat, circular stamping with a centrally located hole, made from 18-8 austenitic stainless steel.
<b>Applications/Advantages</b>	Designed for use with 18-8 stainless steel screws and nuts in general industrial applications where parts are subject to corrosion.
<b>Material</b>	18-8 stainless steel

Disclaimer: The above is a compilation of data, from various industry standards. Conquest Fasteners has taken every effort to present the data accurately. However Conquest Fasteners cannot be held liable for any claim traceable to any errors typographical or otherwise contained herein.