


ST Reamer Screws

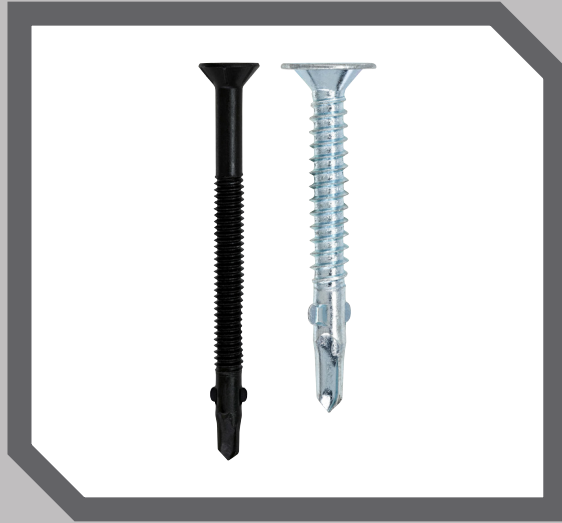

- Family of screws designed to attach plywood & dimensional lumber to steel thickness up to .250".
- Small wings help bore a clearance hole to help prevent premature thread engagement in the wood. The wings break off after drilling is completed.
- Wafer head design is used for plywood applications. Flat head design is used for lumber applications.
- Applications include flooring in steel frame homes & truck body beds.

| SIZE | HEAD STYLE | CARTON QTY | WEIGHT/M |
|-----------------|--------------------------|------------|----------|
| 10-16 x 1-5/8" | #2 SQUARE/PHILLIPS COMBO | 3500 | 9.2/M |
| 12-24 x 2" | #3 PFH | 2000 | 17.5/M |
| 12-24 x 2-1/2" | #3 PFH | 2000 | 19.5/M |
| 1/4-20 x 2-3/4" | #3 PFH | 1500 | 28.6/M |
| 1/4-20 x 3-1/4" | 6 LOBE | 1000 | 35.0/M |

InsulDrill™



- #12 diameter screw has 1/4" HWH. Thread design has excellent holding strength in wood.
- #1 drill point will penetrate steel thickness up to 18 gauge.
- Black e-coat corrosion resistant coating is standard on all screws.
- G-90 bonded sealing washer is assembled to the fastener.
- Applications include retrofit & metal panels through rigid insulation to wood.
- Screws are available in all standard ST Fastening Systems colors (wet-paint process).

| SIZE | HEAD STYLE | CARTON QTY | WEIGHT/M |
|-------------|------------|------------|----------|
| 12 x 3 3/4" | HWH | 1000 | 26.5 |
| 12 x 4 1/2" | HWH | 1000 | 30.7 |
| 12 x 5" | HWH | 1000 | 33.4 |
| 12 x 6" | HWH | 500 | 39.0 |
| 12 x 7" | HWH | 500 | 43.7 |
| 12 x 8" | HWH | 500 | 49.7 |