

Siding/Fencing/Trim Nails


0° Inserted Plastic Coil, Full Round Head, Ring-Shank Nail

Features:

- Checker pattern on head blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Available in Type 304 and aluminum

Compatible Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](https://www.strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

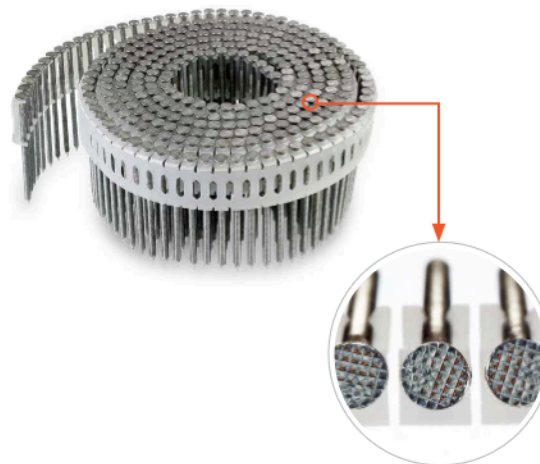

| Brand | Model |
|------------|---|
| Duo-Fast® | KDN50, RCN60, RCN70, CNP-60Y, CNP-65Y, DF225C |
| Spotnails® | QCND65 |

Type 304 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|-------------|
| 7d | 2¼ | 0.099 | 0.210 | 7,200 | S12A225DNB |
| 7d | 2¼ | 0.099 | 0.210 | 1,200 | S12A225DNBP |

Aluminum

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|------------|
| — | 1⅞ | 0.099 | 0.210 | 9,000 | A12A187DNB |

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.

Siding/Fencing/Trim Nails

15° Inserted Plastic Coil, Full Round Head, Ring-Shank Nail


Features:

- Checker pattern on head blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

Compatible Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](https://www.strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

| Brand | Model |
|------------|----------------------------------|
| Bostitch® | N64C, N66C, N75C |
| Grip-Rite® | GRTCS250 |
| Hitachi® | NV65AH, NV75AG |
| Max® | CN550S (up to 2"), CN565S, CN565 |
| Senco® | SCN49 |

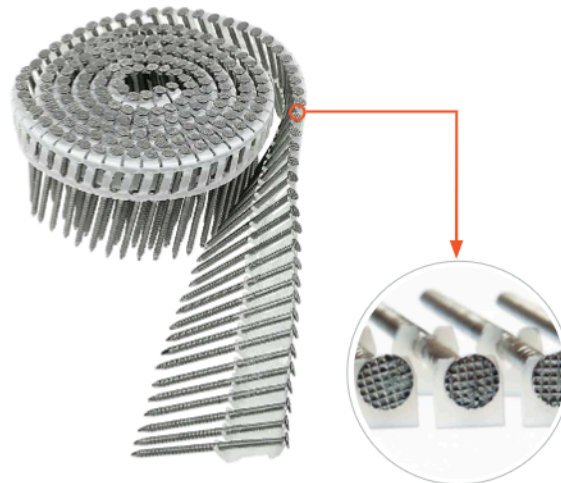

Type 316 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|-------------|
| 4d | 1½ | 0.092 | 0.221 | 3,200 | T13A150IPC |
| 5d | 1¾ | 0.092 | 0.221 | 3,200 | T13A175IPC |
| 5d | 1¾ | 0.092 | 0.221 | 600 | T13A175IPBP |
| 6d | 2 | 0.092 | 0.221 | 3,200 | T13A200IPC |
| 6d | 2 | 0.092 | 0.221 | 600 | T13A200IPBP |
| 7d | 2¼ | 0.092 | 0.221 | 2,400 | T13A225IPC |
| 7d | 2¼ | 0.092 | 0.221 | 600 | T13A225IPBP |
| 8d | 2½ | 0.092 | 0.221 | 2,400 | T13A250IPC |
| 8d | 2½ | 0.092 | 0.221 | 600 | T13A250IPBP |

Type 304 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|-------------|
| 4d | 1½ | 0.092 | 0.221 | 3,200 | S13A150IPC |
| 5d | 1¾ | 0.092 | 0.221 | 3,200 | S13A175IPC |
| 6d | 2 | 0.092 | 0.221 | 3,200 | S13A200IPC |
| 7d | 2¼ | 0.092 | 0.221 | 2,400 | S13A225IPC |
| 7d | 2¼ | 0.092 | 0.221 | 600 | S13A225IPBP |
| 8d | 2½ | 0.092 | 0.221 | 2,400 | S13A250IPC |

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.

Siding/Fencing/Trim Nails


15° Inserted Plastic Coil, Full Round Head, Ring-Shank Nail

Features:

- Checker pattern on head blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

Compatible Tools

If you don't see your particular model in the table below, see strongtie.com/toolmatrix or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

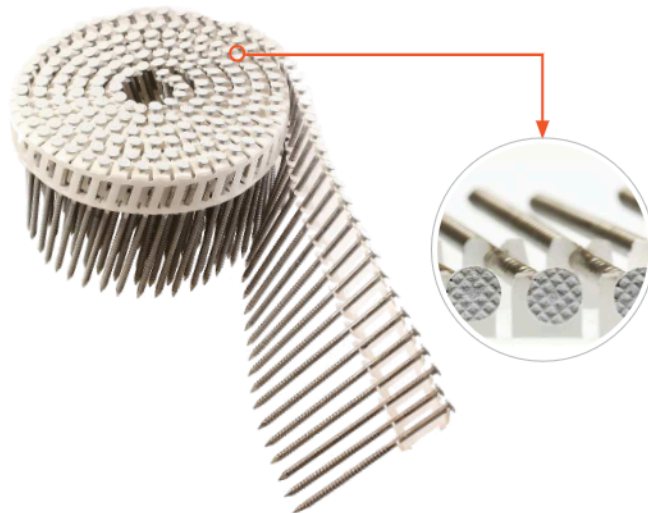

| Brand | Model |
|------------|----------------------------------|
| Bostitch® | N64C, N66C, N75C |
| Grip-Rite® | GRTCS250 |
| Hitachi® | NV65AH, NV75AG |
| Max® | CN550S (up to 2"), CN565S, CN565 |
| Senco® | SCN49 |

Type 304 Stainless Steel — White

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|--------------|
| 8d | 2½ | 0.092 | 0.203 | 600 | S13A250IPWBP |
| 8d | 2½ | 0.092 | 0.203 | 2,400 | S13A250IPW |



Type 316 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Packaging Quantity | Model No. |
|------------|--------------|----------------------|---------------------|--------------------|------------|
| 8d | 2½ | 0.092 | 0.203 | 2,400 | T13A250IPC |


These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.

Siding/Fencing/Trim Nails

15° Wire Coil, Full Round Head, Ring-Shank Siding Nail

Features:

- Ideal for use in fiber-cement boards
- Checker pattern on heads blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Generous underhead fillet allows nails to be driven flush or countersunk, without crushing surrounding wood
- Annular ring shank increases withdrawal resistance to provide a secure attachment that reduces cupping of siding boards
- Slender gauge and diamond point for easier driving
- Choose Type 316 stainless steel for seaside applications and superior corrosion resistance

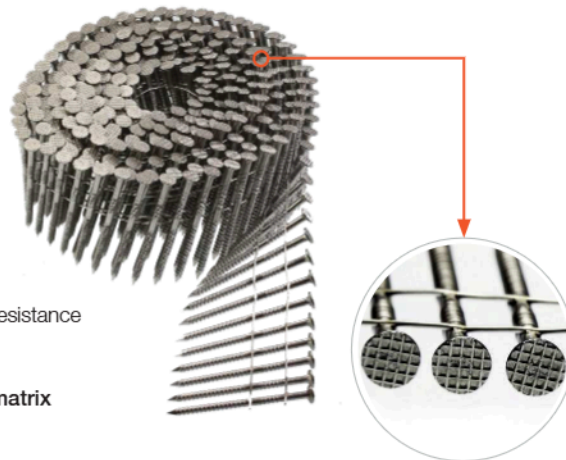

Compatible Tools

If you don't see your particular model in the table below, see strongtie.com/toolmatrix or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

| Brand | Model |
|------------|---|
| Bostitch® | N64C, N66C, N75C |
| Duo-Fast® | P275C |
| Grip-Rite® | GRTCS250 |
| Hitachi® | NV65AH, NV75AG |
| Max® | CN55, CN665, CN565, CN565S, CN550S (up to 2") |
| Senco® | SCN60XP, SCN49, SCN 65XP, Pallet Pro57F (up to 2¼") |

Type 316 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|------------|
| 3d | 1¼ | 0.092 | 0.221 | 1,800 | T13A125SNJ |
| 4d | 1½ | 0.092 | 0.221 | 1,800 | T13A150SNJ |
| 5d | 1¾ | 0.092 | 0.221 | 1,800 | T13A175SNJ |
| 6d | 2 | 0.092 | 0.221 | 1,800 | T13A200SNJ |
| 7d | 2¼ | 0.092 | 0.221 | 1,800 | T13A225SNJ |
| 8d | 2½ | 0.092 | 0.221 | 1,800 | T13A250SNJ |

Type 304 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|-----------------|-------------|
| 3d | 1¼ | 0.092 | 0.221 | 3,600 | S13A125SNC |
| 3d | 1¼ | 0.092 | 0.221 | 1,500 | S13A125SNBP |
| 4d | 1½ | 0.092 | 0.221 | 3,600 | S13A150SNC |
| 4d | 1½ | 0.092 | 0.221 | 1,500 | S13A150SNBP |
| 5d | 1¾ | 0.092 | 0.221 | 3,600 | S13A175SNC |
| 5d | 1¾ | 0.092 | 0.221 | 1,200 | S13A175SNBP |
| 6d | 2 | 0.092 | 0.221 | 3,600 | S13A200SNC |
| 6d | 2 | 0.092 | 0.221 | 1,200 | S13A200SNBP |
| 7d | 2¼ | 0.092 | 0.221 | 3,600 | S13A225SNC |
| 7d | 2¼ | 0.092 | 0.221 | 900 | S13A225SNBP |
| 8d | 2½ | 0.092 | 0.221 | 3,600 | S13A250SNC |

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.

Siding/Fencing/Trim Nails


15° Wire Coil, Painted, Full Round Head, Ring-Shank Nail

Features:

- Checker pattern on heads blends with wood grain, reduces glare from sunlight and accepts surface finishes
- Durable painted finish helps heads blend with siding material
- Annular ring shank increases withdrawal resistance to provide a secure attachment
- Slender gauge and diamond point for easier driving

Compatible Tools

If you don't see your particular model in the table below, see strongtie.com/toolmatrix or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

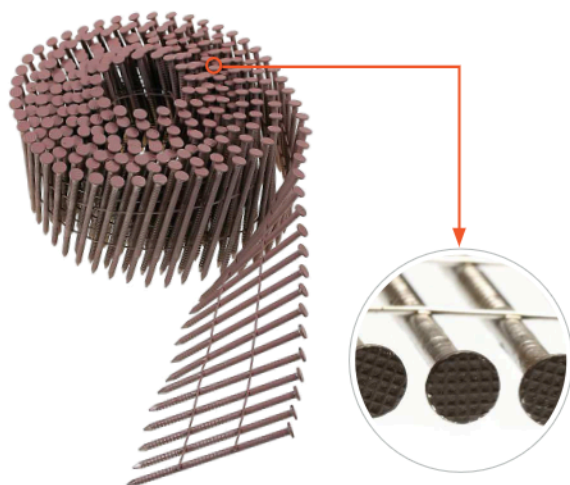

| Brand | Model |
|------------|---|
| Bostitch® | N64C, N66C, N75C |
| Duo-Fast® | P275C |
| Grip-Rite® | GRTCS250 |
| Hitachi® | NV65AH, NV75AG |
| Max® | CN55, CN665, CN565, CN565S, CN550S (up to 2") |
| Senco® | SCN60XP, SCN49, SCN 65XP, Pallet Pro57F (up to 2¼") |

Type 304 Stainless Steel

| Penny Size | Length (in.) | Shank Diameter (in.) | Head Diameter (in.) | Color | Carton Quantity | Model No. |
|------------|--------------|----------------------|---------------------|------------|-----------------|--------------|
| 6d | 2 | 0.092 | 0.221 | White | 1,200 | S13A200WWCBP |
| 6d | 2 | 0.092 | 0.221 | Dark Brown | 3,600 | S13A200CCB |
| 6d | 2 | 0.092 | 0.221 | Gray | 3,600 | S13A200CCG |
| 6d | 2 | 0.092 | 0.221 | Redwood | 3,600 | S13A200CCR |
| 6d | 2 | 0.092 | 0.221 | Tan | 3,600 | S13A200CCT |
| 6d | 2 | 0.092 | 0.221 | White | 3,600 | S13A200CWH |
| 7d | 2¼ | 0.092 | 0.221 | Dark Brown | 3,600 | S13A225CCB |
| 7d | 2¼ | 0.092 | 0.221 | Gray | 3,600 | S13A225CCG |
| 7d | 2¼ | 0.092 | 0.221 | Redwood | 3,600 | S13A225CCR |
| 7d | 2¼ | 0.092 | 0.221 | Tan | 3,600 | S13A225CCT |
| 7d | 2¼ | 0.092 | 0.221 | Sienna | 3,600 | S13A225CCS |
| 8d | 2½ | 0.092 | 0.221 | White | 900 | S13A250WWCBP |
| 8d | 2½ | 0.092 | 0.221 | Dark Brown | 900 | S13A250CCBBP |
| 8d | 2½ | 0.092 | 0.221 | Dark Brown | 3,600 | S13A250CCB |
| 8d | 2½ | 0.092 | 0.221 | Gray | 3,600 | S13A250CCG |
| 8d | 2½ | 0.092 | 0.221 | Redwood | 3,600 | S13A250CCR |
| 8d | 2½ | 0.092 | 0.221 | Tan | 900 | S13A250CCTBP |
| 8d | 2½ | 0.092 | 0.221 | Tan | 3,600 | S13A250CCT |
| 8d | 2½ | 0.092 | 0.221 | White | 3,600 | S13A250CWH |
| 8d | 2½ | 0.092 | 0.221 | Sienna | 900 | S13A250CCSBP |
| 8d | 2½ | 0.092 | 0.221 | Sienna | 3,600 | S13A250CCS |



These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.