

Connector Nails

Strong-Drive® 33° SCN SMOOTH-SHANK CONNECTOR Nail

Features:

- 33° collation angle
- Full round head
- Head ID stamp


See p. 132 for bulk Strong-Drive SCN Smooth-Shank Connector nails.

For Technical Data and Loads, see C-F-2023TECHSUP
Fastening Systems Technical Guide, p. 206


Compatible Tools

If you don't see your particular model in the table below,
see strongtie.com/toolmatrix or call Simpson Strong-Tie
for assistance with fastener selection (800) 999-5099.

Brand	Model
Bostitch®	MCN150 (up to 1 ½"), MCN250, F33PT
Grip-Rite®	GR150 (up to 1 ½"), GRSB150-1 ½ (up to 1 ½"), GR250, GRSB250-2 ½
Hitachi®	NR65AK
Paslode®	PF150S-PP (up to 1 ½"), F250S-PP
Senco®	HN150 (up to 1 ½"), HN250

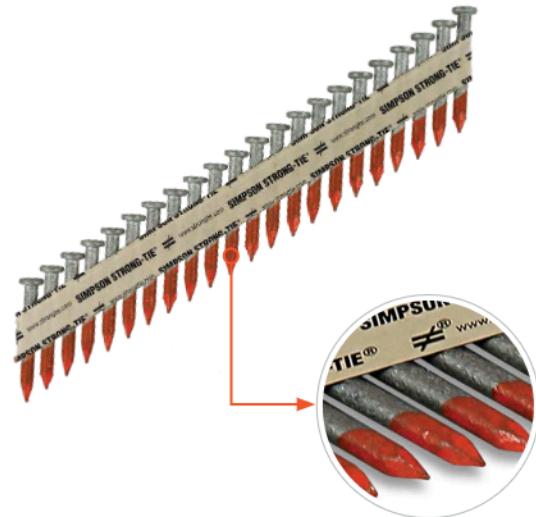

Orange Painted Tip
for Better Visibility



Hot-Dip Galvanized — ASTM A153, Class D

Shank Dia. x Length (in.)	Head Diameter (in.)	Carton Quantity	Model No.	Replacement for
0.131 x 1 ½	0.285	500	N8HDGPT500	8d x 1 ½"
		4,000	N8HDGPT4000	
0.131 x 2 ½	0.285	500	8DHDGPT500	8d common
		2,500	8DHDGPT2500	
0.148 x 1 ½	0.285	500	N10HDGPT500	10d x 1 ½"
		3,000	N10HDGPT3000	
0.148 x 2 ½	0.285	500	N10DHDGPT500	10d x 2 ½"
		2,500	N10DHDGPT2500	
0.162 x 2 ½	0.285	500	N16HDGPT500	16d x 2 ½"
		2,000	N16HDGPT2000	

Bright

Shank Dia. x Length (in.)	Head Diameter (in.)	Carton Quantity	Model No.	Replacement for
0.131 x 1 ½	0.285	4,000	N8BRPT4000	8d x 1 ½"
0.148 x 1 ½		3,000	N10BRPT3000	10d x 1 ½"
0.148 x 2 ½		2,500	N10DBRPT2500	10d x 2 ½"

These products are subject to quantities on hand, or may require special-order, minimum order quantities and longer lead times. Call Simpson Strong-Tie for details (800) 999-5099.

Connector Nails

Strong-Drive® 33° SCNR RING-SHANK CONNECTOR Nail

Features:

- 33° collation angle
- Full round head
- Head ID stamp



See p. 133 for bulk Strong-Drive SCNR Ring-Shank Connector nails.

For **Technical Data and Loads**, see C-F-2023TECHSUP *Fastening Systems Technical Guide*, p. 207

Compatible Tools

If you don't see your particular model in the table below, see [strongtie.com/toolmatrix](https://www.strongtie.com/toolmatrix) or call Simpson Strong-Tie for assistance with fastener selection (800) 999-5099.

Brand	Model
Bostitch®	MCN150 (up to 1½"), MCN250, F33PT
Grip-Rite®	GR150 (up to 1½"), GRSB150-1½ (up to 1½"), GR250, GRSB250-2½
Hitachi®	NR65AK
Paslode®	PF150S-PP (up to 1½"), F250S-PP
Senco®	HN150 (up to 1½"), HN250

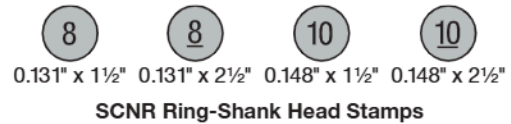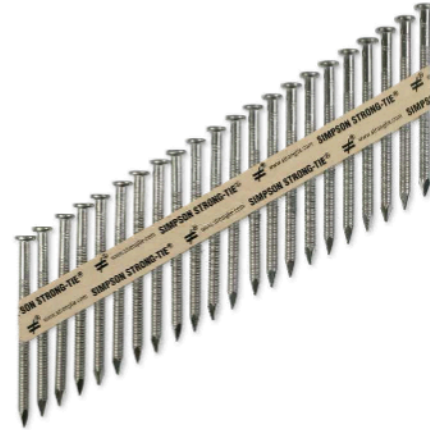

SCNR Ring-Shank Head Stamps

Type 316 Stainless Steel

Shank Dia. x Length (in.)	Head Diameter (in.)	Carton Quantity	Model No.	Replacement for
0.131 x 1½	0.285	1,500	T10A150MCN	8d x 1½
0.131 x 2½	0.285	1,000	T10A250MCN	8d common
0.148 x 1½	0.285	1,500	T9A150MCN	10d x 1½
0.148 x 2½	0.285	1,000	T9A250MCN	10d x 2½